
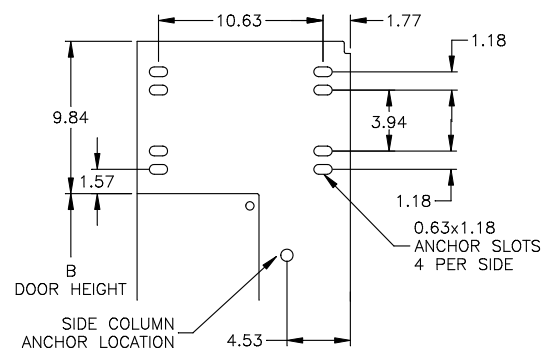
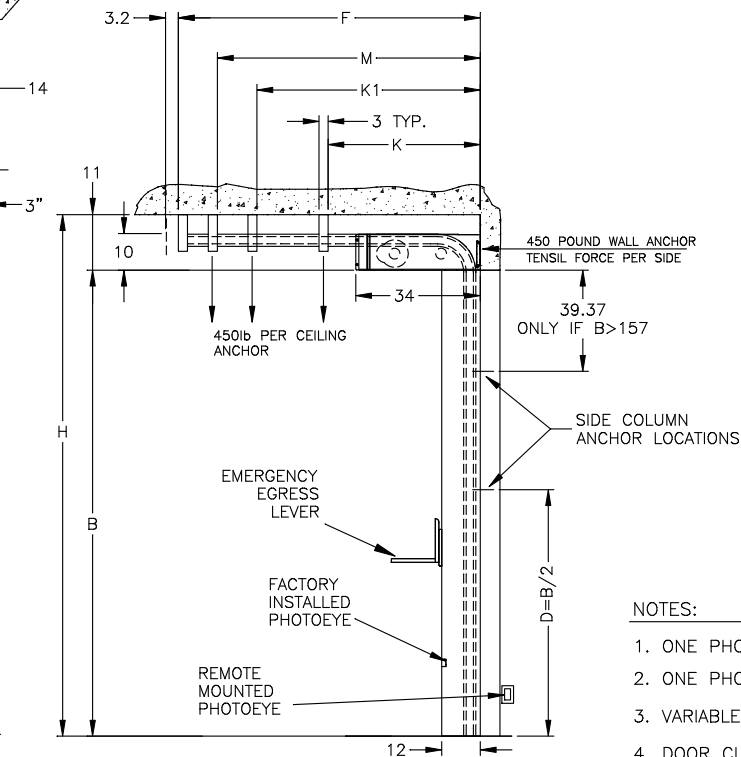
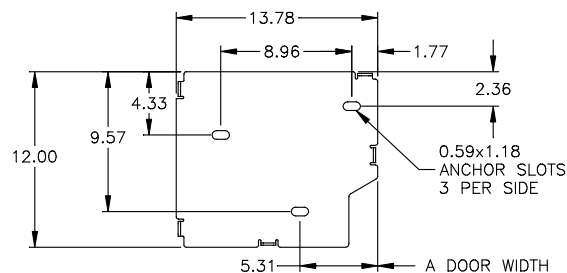


HEIGHT "B": XXXX mm

DOOR NO.	A	B	C	D	K	K1	M	F	VOLTAGE	PHASE	H.P.	H
									460	3	2	

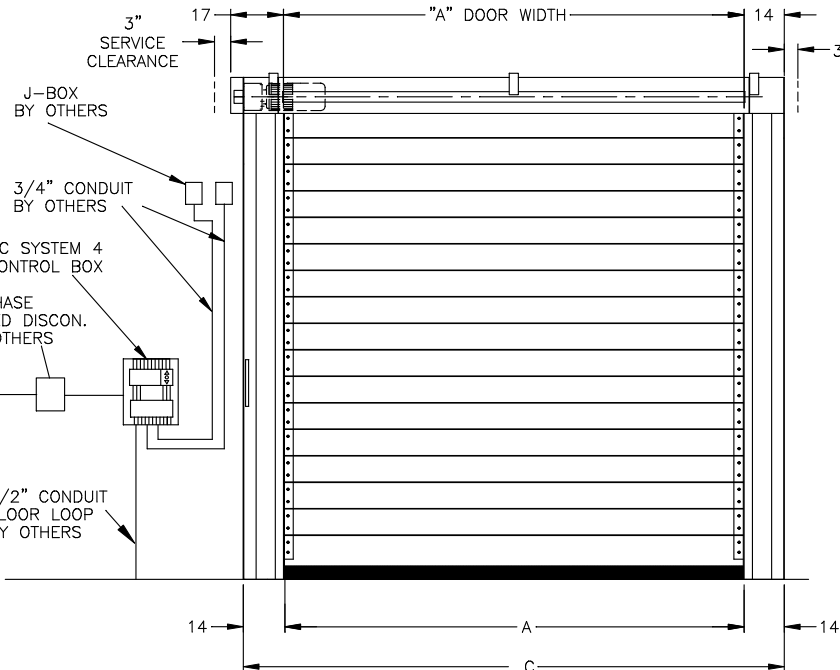

1. ONE PHOTO EYES IN SIDE COLUMN – FACTORY INSTALLED
2. ONE PHOTOEYE FOR FIELD INSTALLATION.
3. VARIABLE DOOR OPENING SPEED UP TO 60" PER SECOND
4. DOOR CLOSING SPEED OF 30" PER SECOND
5. PROGRAMABLE UPPER AND LOWER LIMITS
6. RYTEC SYSTEM4 CONTROL BOX (8 1/2" x 16 1/2")
7. BRAKE RELEASE LEVER ON SIDE COLUMN
8. ELECTRIC FAIL SAFE REVERSING EDGE

☐ MOTION DETECTOR _____
☐ PUSHBUTTON _____
☐ FLOOR LOOP CONTROLLER _____
☐ OTHERS (DESCRIBE IN NOTES) _____

☐ WINDOWS
☐ 1 ☐ 2 ☐ 3 ☐ 4
☒ RYTEC SYSTEM3 CONTROLLER
☐ BUCK BOOSTER TRANSFORMER
 REQ'D FOR 575V APPLICATIONS
☐ 230 VOLT – REQUIRES SINGLE
 PHASE POWER SUPPLY

REV.: