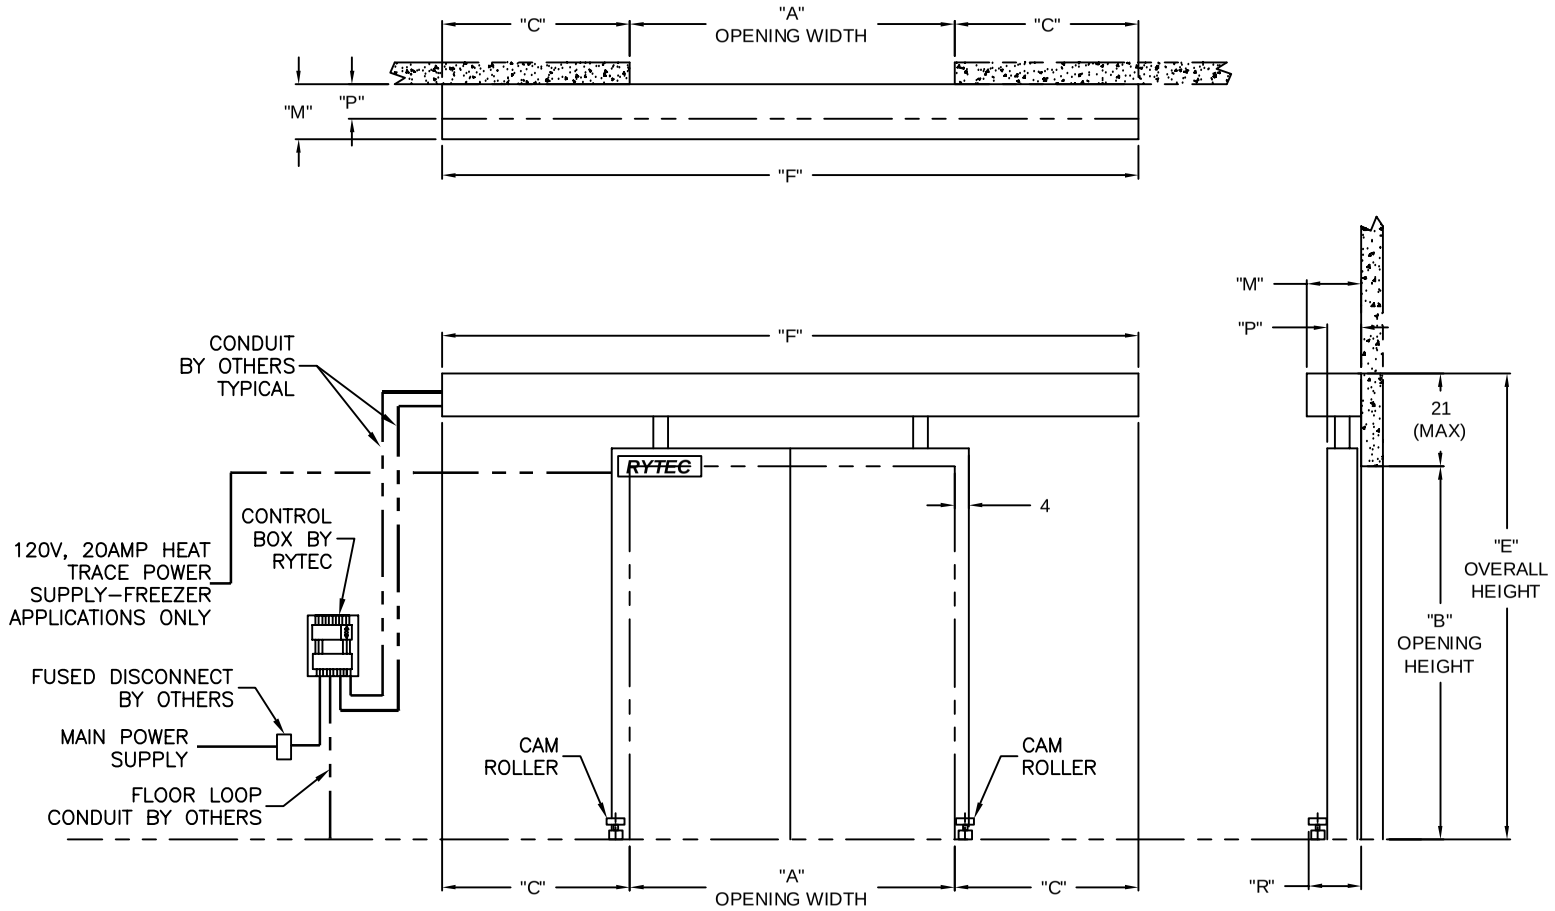

NOTE: DOOR SHOWN IN CLOSED POSITION

	M	P	R
4" PANEL (R17)	13.75	8.50	14.25
6" PANEL (R25)	14.75	10.50	16.25

	C	F
A >= 112.00	(A/2)	(A*2) + 8
A < 112.00	56	A + 120

APPROVAL SIGNATURE

FABRICATION CAN PROCEED ACCORDING TO THE SPECIFICATION SHOWN EXCEPT AS NOTED

APPROVED BY:

PRINT NAME:_____

SIGNATURE: _____

DATE: _____

DRAWING NOT TO SCALE, ALL DIMENSIONS IN INCHES

DOOR NO.	A	B	C	E	F
–	–	–	–	–	–

MODEL

MODEL:

PANEL STYLE
- ☐ 4" (R17)
- ☐ 6" (R25)
- ☐ OTHER _____

PANEL OPTIONS
- ☐ FULL LINE–X
- ☐ LEFT WINDOW
- ☐ RIGHT WINDOW
- ☐ OTHER _____

ELECTRICAL OPTIONS

- ☐ 460v – 3ph
- ☐ 230v/208v – 3ph
- ☐ 230v/208v – 1ph
- ☐ 575v – 3ph
- ☐ OTHER

STANDARD FEATURES

1. SYSTEM 4 AC DRIVE AND CONTROL
2. ONE SET THROUGH BEAM PHOTO EYES, FIELD INSTALLED, NOT SHOWN.
3. R17, 4" THICK PANEL
4. ARMOR LOCK EDGE SEALS
5. ADVANCED THERMAL PLASTIC PANEL SURFACE

STANDARD OPTIONS

- ☐ RIGHT HAND CONTROL & MOTOR (LH STD.)
- ☐ OTHERS (DESCRIBE IN NOTES)

ACTIVATION

- ☐ __ PHOTOEYE
- ☐ __ PULL CORDS
- ☐ __ MOTION DETECTOR
- ☐ __ RADIO CONTROL
- ☐ __ PUSHBUTTON
- ☐ __ FLOOR LOOP
- ☐ OTHERS (DESCRIBE IN NOTES)

OPTION NOTES

NOTES:

RYTEC CORPORATION
ONE CEDAR PARKWAY, JACKSON, WI 53037–0403

APPROVAL DRAWING

TURBO SLIDE® BI - PART - SYSTEM 4

CUSTOMER:

LOCATION:

DATE: REV.: –

DRAWING NO.: 402094–03T